

PC 121211



Sample image

Order symbol : PC 121211

Product nr : 7032690

Description : Enclosure, PC


Remarks : Grey cover

EAN : 6418074058409

El. number :

- Finland : 3435360
- Denmark : 8212002788
- Sweden : 2536122

Including : Base with screws for mounting plate/DIN-rail. cover with PUR gasket and stainless steel cover screws.

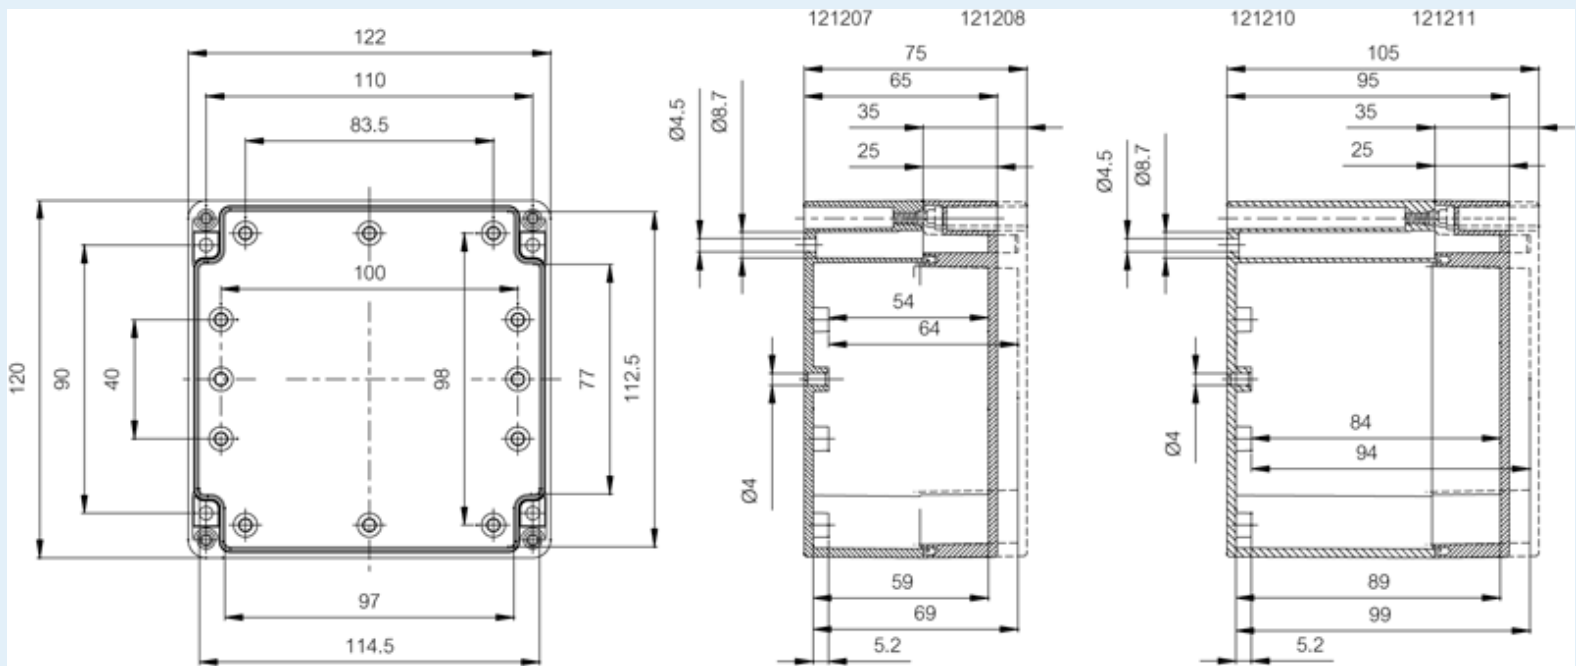

| Dimensions : | Height | Width | Depth |
|--------------|--------|-------|-------|
| mm : | 120 | 122 | 105 |
| inch : | 4.72 | 4.8 | 4.13 |

Materials :

| | |
|---------------|---------------|
| Material : | Polycarbonate |
| Base colour : | RAL_7035 |

Accessories :

| | |
|----------|---------------------------------------------------------|
| TRH 1212 | DIN-35 Mounting rail, for enclosures: (110 x 35 x 1) |
| TRM 0812 | DIN-15 Mounting rail, for enclosures: (106 x 15 x 1) |
| TRM 1212 | DIN-15 Mounting rail, for enclosures: (110 x 15 x 1) |
| TF 28037 | Wall fastening lug (4 pcs), for enclosures: |
| TM 1212 | Mounting plate, for enclosures: (96 x 111 x 1) |

Cover colour : RAL 7035 -light grey
Gasket material : Polyurethane

TH A Grey plastic hinges (2 pcs)

Temperatures :

Temperature °C (short term) : -40 ... 120
Temperature °C (continuous) : -40 ... 80
Temperature °F (short term) : -40 ... 250
Temperature °F (continuous) : -40 ... 175

Ratings :

Ingress protection (EN 60529): IP66; IP67;
Impact Resistance (EN 62262): IK07; IK08;
electrical_insulation : Totally insulated
Halogen free (DIN/VDE 0472, Part 815) : Yes
UV resistance : UL 508
Flammability Rating : UL 746C 5"
Glow Wire Test (IEC 695-2-1) °C : 960C

Certificates :

SGSFimko_EURONORD