

PC 122009



Sample image

Order symbol : PC 122009

Product nr : 7032770

UL Name : UL PC 122009

Description : Enclosure, PC


Remarks : Grey cover

EAN : 6418074058423

El. number :

- Finland : 3435364
- Denmark : 8212003143
- Sweden : 2536126

Including : Base with screws for mounting plate/DIN-rail. cover with PUR gasket and stainless steel cover screws.

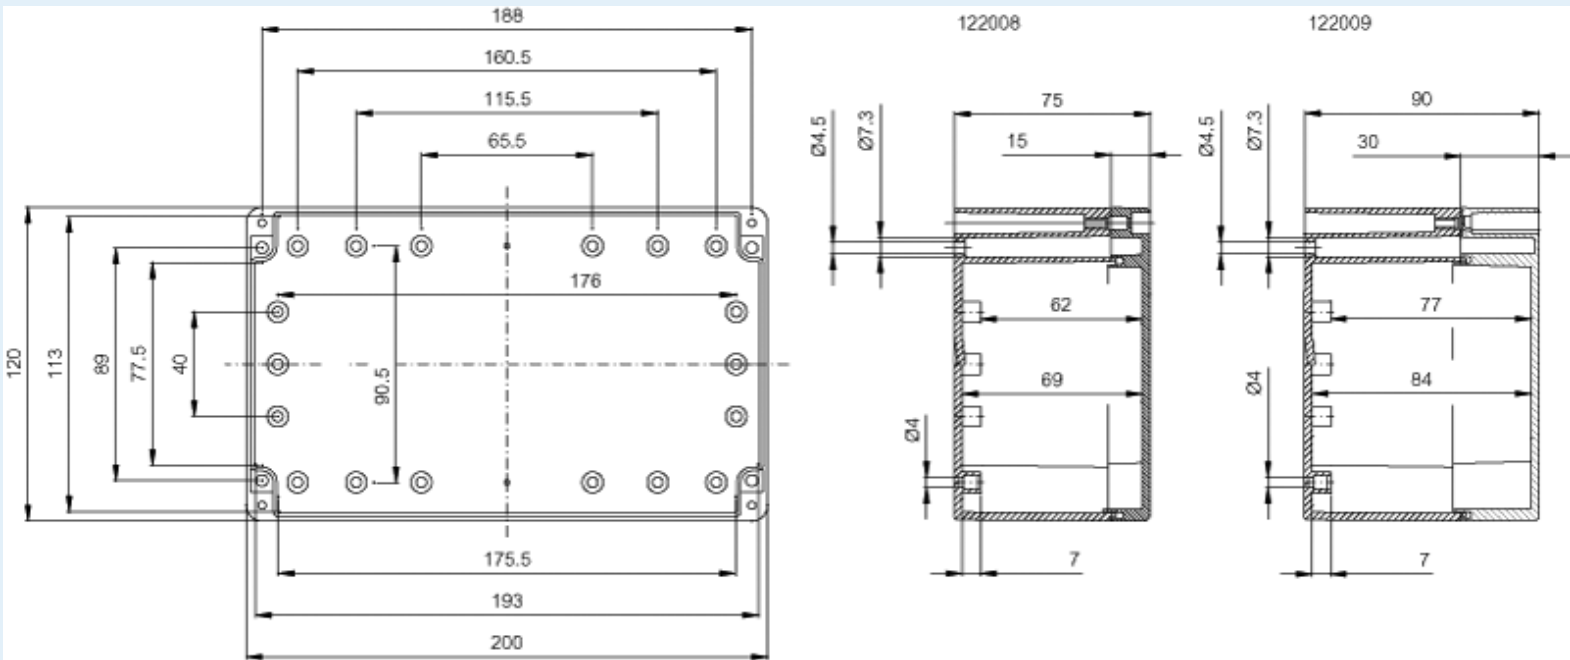

| Dimensions : | Height | Width | Depth |
|--------------|--------|-------|-------|
| mm : | 120 | 200 | 90 |
| inch : | 4.72 | 7.87 | 3.54 |

Accessories :

- MIV 10 DIN-35 Mounting rail, for enclosures: (100 x 35 x 1)
- TF 28037 Wall fastening lug (4 pcs), for enclosures:
- TRH 1220 DIN-35 Mounting rail, for enclosures:

Materials :

| | |
|-------------------|----------------------|
| Material : | Polycarbonate |
| Base colour : | RAL_7035 |
| Cover colour : | RAL 7035 -light grey |
| Gasket material : | Polyurethane |

Temperatures :

| | |
|-------------------------------|-------------|
| Temperature °C (short term) : | -40 ... 120 |
| Temperature °C (continuous) : | -40 ... 80 |
| Temperature °F (short term) : | -40 ... 250 |
| Temperature °F (continuous) : | -40 ... 175 |

(186 x 35 x 1)

| | |
|---------|--|
| TM 1220 | Mounting plate, for enclosures: (111 x 174 x 2) |
| TH A | Grey plastic hinges (2 pcs) |

Ratings :

| | |
|---|-------------------|
| Ingress protection (EN 60529): | IP66; IP67; |
| Impact Resistance (EN 62262): | IK07; IK08; |
| electrical_insulation : | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes |
| UV resistance : | UL 508 |
| Flammability Rating : | UL 746C 5" |
| Glow Wire Test (IEC 695-2-1) °C : | 960C |

Certificates :

SGSFimko_EURONORD