

# PC 162515



Sample image

**Order symbol :** PC 162515

**Product nr :** 7032740

UL Name : UL PC 162515

**Description :** Enclosure, PC


**Remarks :** Grey cover

**EAN :** 6418074058485

**El. number :**

- Finland : 3435376
- Denmark : 8212002982
- Sweden : 2536132

**Including :** Base with screws for mounting plate/DIN-rail. cover with PUR gasket and stainless steel cover screws.

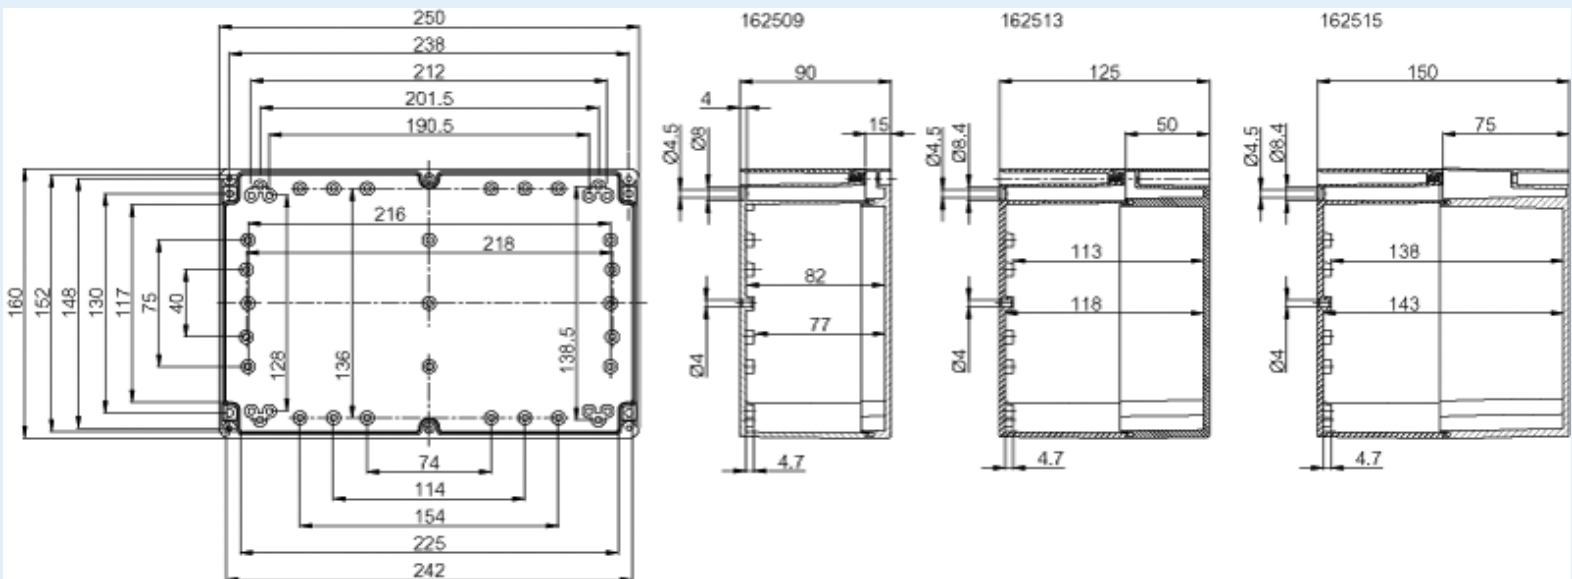

Dimensions :	Height	Width	Depth
mm :	160	250	150
inch :	6.3	9.84	5.91

**Materials :**

**Accessories :**

- TM 1625 Mounting plate, for enclosures: (151 x 214 x 1)
- TRH 24 DIN-35 Mounting rail, for enclosures: (226 x 35 x 1)
- TF 28037 Wall fastening lug (4 pcs), for enclosures:
- TRH 1216 DIN-35 Mounting rail, for enclosures:

Material : Polycarbonate  
Base colour : RAL\_7035  
Cover colour : RAL 7035 -light grey  
Gasket material : Polyurethane

(146 x 35 x 1)  
TRM 0816 DIN-15 Mounting rail, for enclosures:  
(146 x 15 x 1)  
TH A Grey plastic hinges (2 pcs)

**Temperatures :**

Temperature °C (short term) : -40 ... 120  
Temperature °C (continuous) : -40 ... 80  
Temperature °F (short term) : -40 ... 250  
Temperature °F (continuous) : -40 ... 175

**Ratings :**

Ingress protection (EN 60529): IP66; IP67;  
Impact Resistance (EN 62262): IK07; IK08;  
electrical\_insulation : Totally insulated  
Halogen free (DIN/VDE 0472, Part 815) : Yes  
UV resistance : UL 508  
Flammability Rating : UL 746C 5"  
Glow Wire Test (IEC 695-2-1) °C : 960C

**Certificates :**

SGSFimko\_EURONORD