

PC 203615



Sample image

Order symbol : PC 203615

Product nr : 7032790

Description : Enclosure, PC


Remarks : Grey cover

EAN : 6418074058508

El. number :

- Finland : 3435380
- Denmark : 8212003020
- Sweden : 2536134

Including : Base with screws for mounting plate/DIN-rail. cover with PUR gasket and stainless steel cover screws.

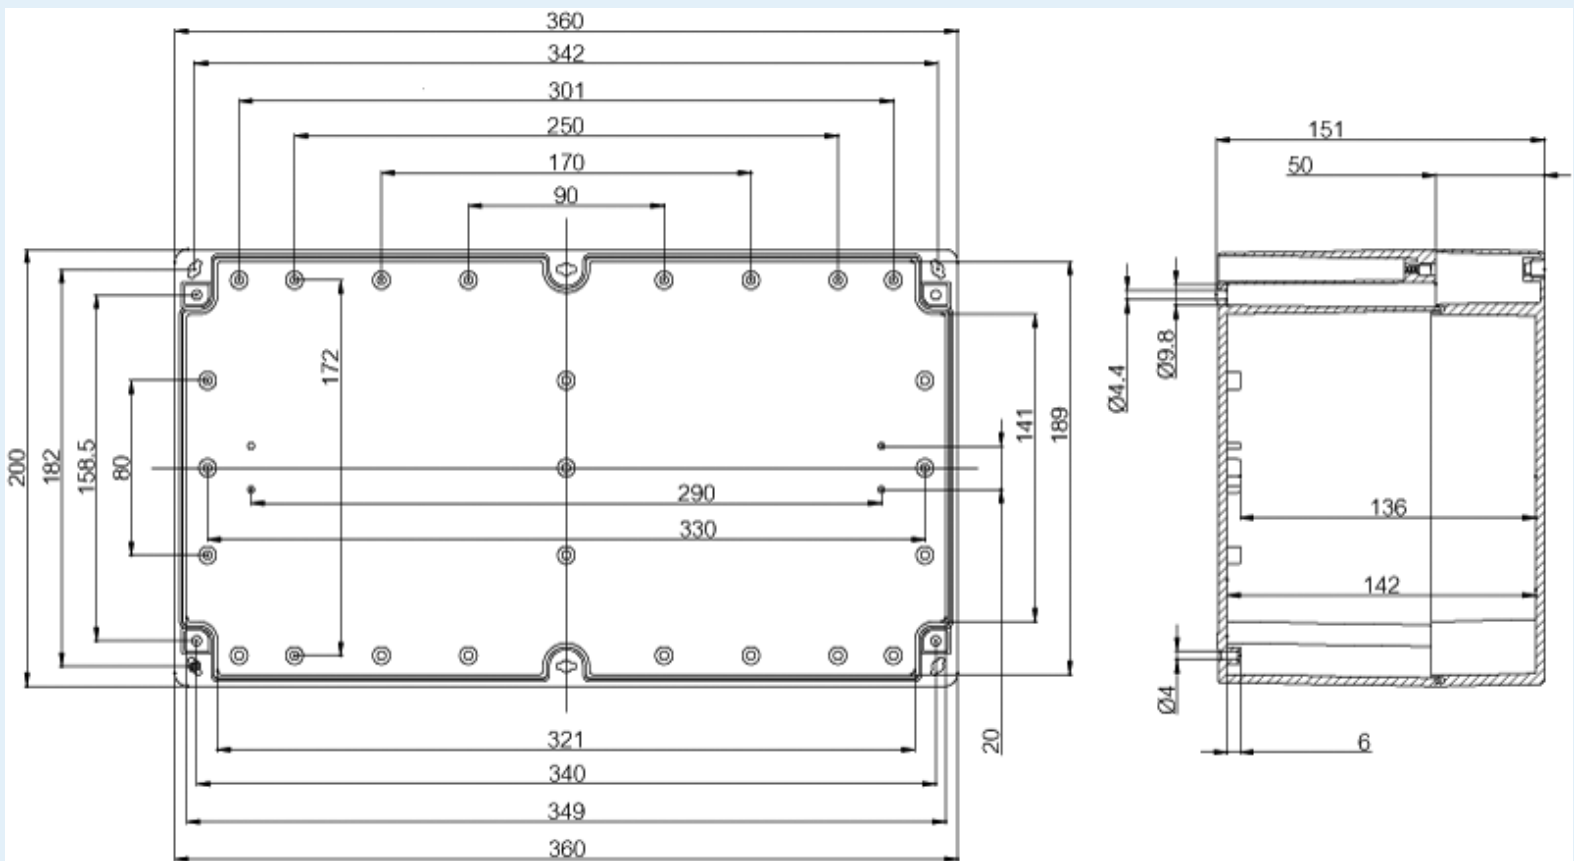

| Dimensions : | Height | Width | Depth |
|--------------|--------|-------|-------|
| mm : | 200 | 360 | 150 |
| inch : | 7.87 | 14.17 | 5.91 |

Accessories :

- TF 28037 Wall fastening lug (4 pcs), for enclosures:
- TM 2036 Mounting plate, for enclosures: (318 x 186 x 1.5)

Materials :

| | |
|-------------------|----------------------|
| Material : | Polycarbonate |
| Base colour : | RAL_7035 |
| Cover colour : | RAL 7035 -light grey |
| Gasket material : | Polyurethane |

Temperatures :

| | |
|-------------------------------|-------------|
| Temperature °C (continuous) : | -40 ... 80 |
| Temperature °F (continuous) : | -40 ... 175 |

| | |
|----------|---|
| TH A | Grey plastic hinges (2 pcs) (30 x 20 x 12) |
| TRH 2036 | DIN-35 Mounting rail, for enclosures: (35 x 340 x 1.5) |

Ratings :

| | |
|---|-------------------|
| Ingress protection (EN 60529): | IP66; IP67; |
| Impact Resistance (EN 62262): | IK07; IK08; |
| electrical_insulation : | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes |
| UV resistance : | UL 746C |
| Flammability Rating : | UL 94 V0 |
| Glow Wire Test (IEC 695-2-1) °C : | 960C |

Certificates :

SGSFimko_EURONORD