

SSP Pushbutton Enclosure

IP-SSSRP3-30

316 STAINLESS STEEL | SLOPED ROOF | IP66 | IP67 | IP69K

240H x 120W x 90D

The IP Enclosures SSP range of Sloped Roof Stainless Steel Pushbutton Enclosures are designed for use in the harshest environments. The sloped roof range is available with either Ø22.5mm holes or Ø30.5mm holes. They are available in 1 hole, 2 hole, 3 hole, 4 hole, and 6 hole configurations. They are provided with a silicone seal that is resistant to harsh chemicals. Our full range of Pushbutton Enclosures are made in Italy using the highest quality materials and processes.

Protection: IP66, IP67, IP69K, NEMA 4x

Standards (& Conformities): IEC/EN/AS60529, UL508A, RoHS



Material:

- Body: 1.0mm Grade 316 Stainless Steel
- Lid/Door: 1.0mm Grade 316 Stainless Steel
- Seal: Silicone
- Washers: NBR 70 (Nitrile Butadiene Rubber)

Body: The robust monoblock body is fabricated using 1.0mm Grade 316 Stainless Steel. The sloped roof range consists of a sloped roof design that protrudes past pushbuttons and incorporates top and bottom external mounting flanges specifically designed for the mining industry.



Lid/Door: The robust pre-drilled lid/door is fabricated using 1.0mm Grade 316 Stainless Steel and is fastened using screws. The screws are provided with NBR 70 (Nitrile Butadiene Rubber) washers for use in harsh environments where hydrocarbons are present.

Seal: A high quality Silicone seal.

Surface Finish: 0.4 micron Ra surface brushed finish.

Hole: 3x Ø30.5mm.

Mass: 1.60Kg.

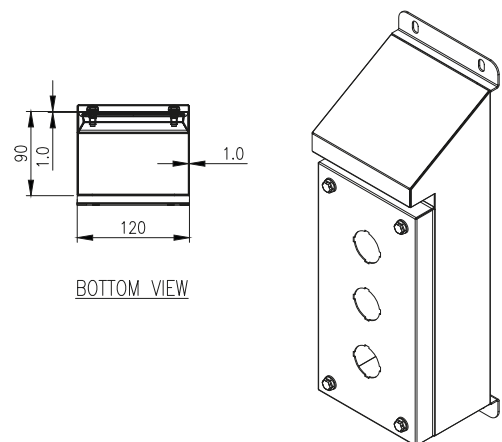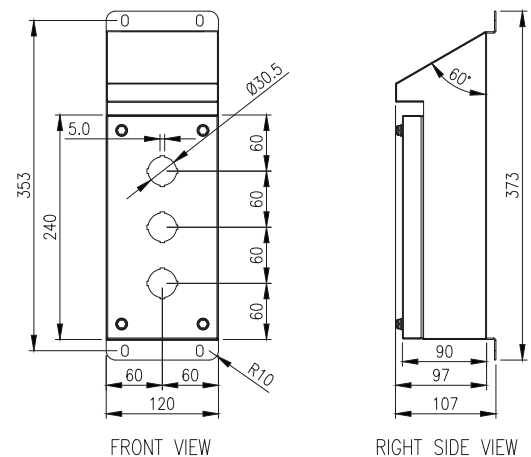

SSP Pushbutton Enclosure

IP-SSSRP3-30

316 STAINLESS STEEL | SLOPED ROOF | IP66 | IP67 | IP69K

240H x 120W x 90D

ACCESSORIES:

| Part Number | Description |
|-------------|--|
| IP-304-FMB | 304 Stainless Steel Flat Wall Mounting Brackets for Pushbutton Enclosures (Set of 4) |
| IP-SST-FWMB | 304 Stainless Steel Flat Brackets for Pushbutton Enclosures (Set of 4) |
| IP-SST-RWMB | 304 Stainless Steel Raised Brackets for Pushbutton Enclosures (Set of 4) |

Products are manufactured to Quality, Safety and Environmental Standards.

WARRANTY: 5 years.